

## Portable Safety Built to Last

Designed for optimal fall-arrest defense, SeamSAFE anchors have been rigorously tested to exceed/meet ANSI and OSHA standards and support up to 5,000 pounds. They are 100% guaranteed and made in the USA.

The anchor consists of two solid blocks of 6061-T aircraft aluminum that clamp onto a single standing seam. Three bolts with locking washers and nuts connect the blocks. The anchor functions by loosening the nuts, separating the blocks, and fitting them over a single standing seam. After positioning on a metal seam, the nuts are tightened with a single box-end wrench.

Once a SeamSAFE anchor is properly attached to a metal roof seam and tethered to a roofer's harness, the anchor will break any fall.



## Best by Design

**SeamSAFE anchors represent the gold standard in portable fall protection for standing seam roofers.**

- Twice the holding surface of other standing seam anchors
- Fast, single-wrench installation in under a minute
- Low-profile geometry to reduce slip potential
- Lightweight, hands-free transport

In addition, SeamSAFE anchors can be used to mount rooftop apparatus that ranges from solar panels to walkways to heavy equipment.



	SeamSAFE Anchors	Competitor A	Competitor B
Length of Holding Surface Grip	12"	4-6"	6"
Fast Single-Wrench Installation	✓	✓	X
Number of Bolts for Easy Installation	3	12	4
Supported Weight	5,000 lbs	5,000 lbs	5,000 lbs
Aircraft Alloy Aluminum	✓	✓	X

### Contact Us

To learn more about SeamSAFE products, visit **SeamSAFE.com** or call **855-263-1521**. We encourage you to contact us anytime if you have questions or seek advice on which anchor best meets your needs.

**Doug Mullins** SeamSAFE Owner and Inventor  
doug@constructionsspecialtyanchors.com


**Kristi McClure** Vice President of Sales  
kristi@constructionsspecialtyanchors.com



# SeamSAFE™

## Roof Safety Anchors + Brackets

### Superior Fall Protection & Versatility

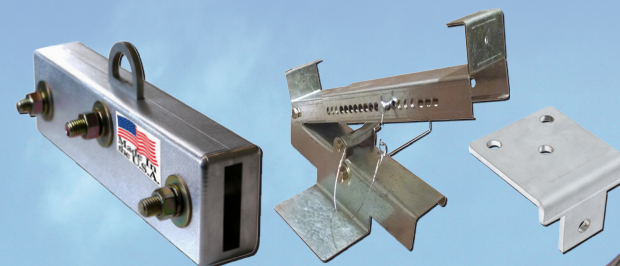

## Simple | Safe | Portable

SeamSAFE.com • 855-263-1521

## When Safety Counts, Choose SeamSAFE

Advanced design and expert engineering make SeamSAFE roof anchors the best choice for fall protection for anyone working on a standing seam metal roof. No other anchor matches the construction integrity, safety features and versatility provided by SeamSAFE.

**Unparalleled Holding Surface:** SeamSAFE anchors protect standing seam roofers with the most secure and largest gripping surface of any anchor in the industry. Roofers benefit from 12 inches of holding surface, compared to only 4 to 6 inches that other anchors provide.

**Fast, Easy Installation:** SeamSAFE anchors are lightweight and easily carried to a roof hands free by being clipped to a roofer's belt. Installing a SeamSAFE anchor takes a minute or less and only requires a single wrench to tighten three bolts.




**Complete Safety System:** SeamSAFE anchors can be used along with SeamSAFE roof brackets to provide the ultimate fall-arrest system. Together, they offer secure support for standing seam roofers, their tools and roofing materials.

**Multi-Purpose Utility:** SeamSAFE anchors are designed for both temporary and permanent use. In addition to fall protection, the anchors can be used to hold solar panels, roof jacks and other rooftop objects in place. When fitted with SeamSAFE mounting adapters, the anchors effectively secure heavy equipment and other rooftop apparatus to standing seam roofs.

## SeamSAFE ANCHORS


Anchors come in five sizes to accommodate nearly all standing seam roofs.



*The Model 1 anchor handles seam heights of 1.25+ inches and widths of .6 inch. For illustrations of other models, visit [SeamSAFE.com](http://SeamSAFE.com)*

## SeamSAFE ROOF BRACKETS

Pair with SeamSAFE anchors to provide secure support for roofers, tools and materials.



## SeamSAFE MOUNTING ADAPTERS

Use with SeamSAFE anchors to securely mount rooftop equipment.



## SeamSAFE: The Trusted Name in Fall Protection

Since introducing the first standing seam anchor more than a decade ago, SeamSAFE has continued to lead in safety, features and performance.

### Anchor Sizes

A variety of anchor sizes are available to accommodate nearly every standing seam metal roof. Custom anchors are also available.

Anchor Models	Seam Height	Maximum Seam Width
M1	1.25+ inches	.6 inch
M2	1.25+ inches	1 inch
M3	2.25+ inches	.6 inch
M4	1.25+ inches	1.3 inches
M5	1.25+ inches	.85 inch

### SeamSAFE Roof Brackets

When paired with SeamSAFE anchors, SeamSAFE roof brackets enhance productivity and safety by providing a means to mount a temporary rooftop walk board for roofers to use during installations and repairs. The brackets also are used to create a staging area on the roof for gear and materials.

### SeamSAFE Mounting Adapters

SeamSAFE mounting adapters can be used along with SeamSAFE anchors to attach HVAC units, industrial piping, walk boards, permanent steps, handrail systems, and other devices to standing seam roofs. The adapter fits all SeamSAFE anchors and features a 4-inch x 4-inch mounting surface with precision-drilled holes. The unique design allows for flexible, reliable mounting of a full range of rooftop equipment.