

When Safety Counts, Choose SeamSAFE

Advanced design and expert engineering makes SeamSAFE roof anchors the best choice for fall protection for anyone working on a standing seam metal roof. No other anchor matches the construction integrity, safety features and versatility provided by SeamSAFE.

Largest Gripping Surface: SeamSAFE anchors protect standing seam roofers with the largest gripping surface of any anchor in the industry. Roofers benefit from 12 inches of holding surface, compared to only 4 to 6 inches that other anchors provide.



Unparalleled Strength: SeamSAFE anchors are certified to support up to 10,500 pounds. This is more than double the weight supported by other standing seam anchors.

Fast and Easy Installation: SeamSAFE anchors are lightweight and easily carried to a roof hands free by being clipped to a



roofer's belt. Installing a SeamSAFE anchor takes a minute or less and only requires a single wrench to tighten three bolts.

Roofing Project Versatility: SeamSAFE anchors can be paired with SeamSAFE roof brackets to mount a walkboard to use during installations and repairs. The brackets can also be used to create a staging area for gear and materials.

Multi-Purpose Utility: SeamSAFE anchors are designed for both temporary and permanent use. In addition to fall protection, the anchors can be used to hold solar panels, roof jacks and other rooftop objects in place. When fitted with SeamSAFE attachments or adaptors, the anchors secure heavy equipment, ladders, toe boards, and other apparatus to standing seam roofs.



SeamSAFE: The Trusted Name in Fall Protection

SeamSAFE anchors represent the gold standard in portable fall protection for standing seam roofers.

- More than double the weight-bearing strength of other anchors
- Twice the holding surface of other standing seam anchors
- Fast, single-wrench installation in under a minute
- Low-profile geometry to reduce slip potential
- Lightweight, hands-free transport

Contact Us

To learn more about SeamSAFE products, visit SeamSAFE.com or call **855-263-1521**. Contact us anytime if you have questions or seek advice on which anchor best meets your needs.

Doug Mullins

SeamSAFE Owner and Inventor
doug@constructionsspecialtyanchors.com

Kristi McClure

Vice President of Sales
kristi@constructionsspecialtyanchors.com


SeamSAFE™
Roof Safety Anchors + Brackets
©Construction Specialty Anchors LLC



SeamSAFE™
Roof Safety Anchors + Brackets

Superior Fall Protection & Versatility




SeamSAFE.com
855-263-1521

SeamSAFE Anchor Choices



MODEL 1 ANCHOR

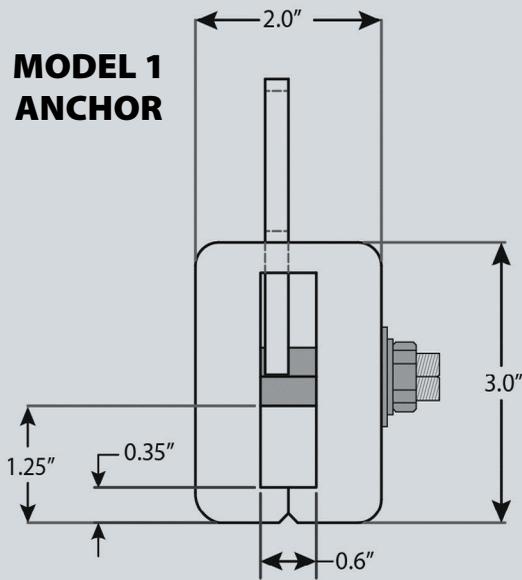

The Model 1 anchor handles seam heights of 1.25" and widths of .6". For illustrations of other models, visit SeamSAFE.com.

A variety of anchor sizes are available to accommodate nearly every standing seam metal roof. Custom anchors are also available.

Anchor Models	Seam Height	Maximum Seam Width
Model 1	1.25 inches	.6 inch
Model 2	1.25 inches	1 inch
Model 3	2.25 inches	.6 inch
Model 4	1.25 inches	1.5 inches
Model 5	1.25 inches	.85 inch
Model 6	2.25 inches	.85 inch

When Safety Counts COMPARE STANDING SEAM ROOF ANCHORS

	SeamSAFE Anchors	Competitor A	Competitor B
Length of Holding Surface Grip	12"	4-6"	6"
Fast Single-Wrench Installation	✓	✓	X
Number of Bolts for Easy Installation	3	12	4
Supported Weight	10,500 lbs	5,000 lbs	5,000 lbs
Aircraft Alloy Aluminum	✓	✓	X

Portable Safety Built to Last

Designed for optimal fall-arrest defense, SeamSAFE anchors have been rigorously tested to exceed/meet ANSI and OSHA standards. They are 100% guaranteed and made in the USA.

The anchor consists of two solid blocks of 6061-T aircraft aluminum that clamp onto a single standing seam. Three bolts with locking washers and nuts connect the blocks. The anchor functions by loosening the nuts, separating the blocks, and fitting them over a single standing seam. After positioning on a metal seam, the nuts are tightened with a single box-end wrench.

Once a SeamSAFE anchor is properly attached to a metal roof seam and tethered to a roofer's harness, the anchor will break any fall.

Since introducing the first standing seam anchor more than a decade ago, SeamSAFE has continued to lead in safety, features and performance.



SeamSAFE Accessories

SeamSAFE Roof Brackets



Pair with SeamSAFE anchors to mount a temporary rooftop walkboard for roofers or a staging area for tools and materials.



SeamSAFE Ladder Attachment

Use with SeamSAFE anchors to install a rooftop ladder for access to different roof areas and levels.

SeamSAFE Toe Board Attachment



Fit with SeamSAFE anchors to quickly and securely mount a toe board for roofing projects.



SeamSAFE Mounting Adapters

Use with SeamSAFE anchors to temporarily or permanently install rooftop equipment.